



ITEM NO. c5H01-X, c5H "Category 5 Hurricane" Dual Rear-Exhaust Pipe for the HPI Savage & XL

Installation instructions: (Optional #HSA01 Aluminum shock tower shown in the pictures below.)

Preparation:


1. Uninstall the stock exhaust pipe, manifold spring, manifold and gasket on the engine exhaust port.
2. Clean the excess residue on the engine exhaust port.
3. Uninstall the rear bumper.
4. Remove the bottom two screws on the rear shock tower and save them for installing the mounting wires (step 3)

What's in the box:


1. c5H pipe x 1
2. M4 set screw x 2
3. Mounting wire x 2
4. Manifold x 1
5. Gasket x 1
6. Manifold spring x 1
7. Silicone tube x 1
8. Zip-tie x 2
9. Instruction sheet



Install the gasket, manifold, and manifold spring.

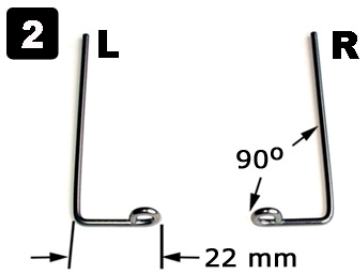

Bend mounting wires as shown.

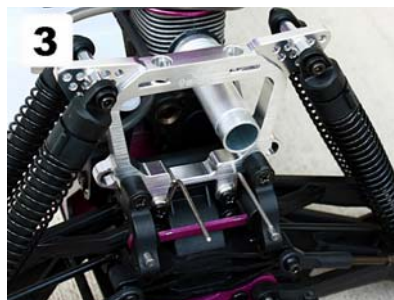

Install the mounting wires onto the lower shock tower mounting screw holes.




Install the silicone coupler onto the pipe.



Insert the mounting wires through the brackets on the bottom of the pipe, and connect the manifold to the pipe. Secure the pipe with M4 set screws.



Connect the pressure fuel line, and zip-tie the silicone coupler. Put rear bumper back on. Done!

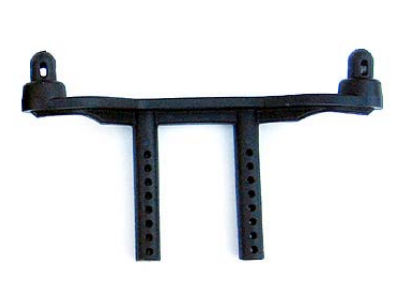

You may need to trim the rear body post to fit your application.

Technical Notes:

*YOU WILL HAVE TO RE-TUNE YOUR ENGINE AND THE SHIFT POINT FOR THE 2/3-SPEED TRANSMISSION. We highly recommend that you use a new glow plug to tune your engine after you install the dual exhaust pipe.

**Log onto <http://www.tsais.com> for continuous product updates and technical notes.

Warranty: TSAIS exhaust systems are covered against manufacturer's defects in materials, workmanship or assembly when systems are new (before installation). All warranty claims are handled by TSAIS/RCHub in the US, or authorized importers/distributors in your country or region.

HPI Savage is a trade mark of HPI.

Tech Support/Customer Service: Phone: +1 816-224-2070

E-mail: support@tsais.com, URL: <http://tsais.com>

©Copyright 2005 by TSAIS All rights reserved.

Version: 20090830